

# SARATTO INSTRUCTION

## Acceptable weight and height



Acceptable weight: 9 kgs through 18 kgs

Acceptable height: 75 cm through 100 cm

Age for reference: 1 through 4 year-old

**Note:** **Install Impact Shield without failure**



Acceptable weight: 15 kgs through 25 kgs

Acceptable height: 100 cm through 120 cm

Age for reference: 3 through 7 year-old




Acceptable weight: 15 kgs through 36 kgs

Acceptable height: 100 cm through 145 cm


Age for reference: 3 through 11 year-old

## Verify that following components are involved.

Booster Seat




Backrest




Impact Shield




Headrest



## Part names




Belt-guide



Waist belt conduit

Shoulder belt conduit  
Keep the manual in the  
pocket on the back




Pocket

## Part names of a car


Backrest

Shoulder seat belt




## How to assemble


1. Joint booster seat and backrest together as shown in Fig.




2. Lift a backrest to upright position as shown in Fig.



3. Insert headrest into guide holes on backrest and depress it until it clicks.

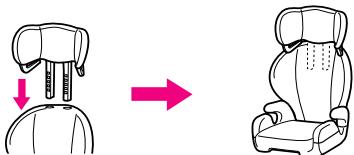


4. Put a flap of seating surface into backrest as shown in Fig.




## How to detach

1. Recline backrest until it comes flat.

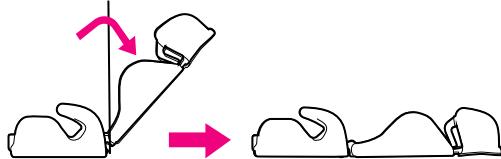


2. Lift backrest up to detach it from seating surface.



## How to use child safety seat **with** impact shield


1. Place child safety seat on a car's seat facing forward. Backrest of the product should contact car's backrest as close as possible.




2. Sit a child on a safety seat with its spine pressed against backrest. Install Impact Shield as it contacts with chest of child, and fix it by flaps right and left




3. Thread waist seat belt through seat belt conduit and buckle up for sure as shown in Fig.

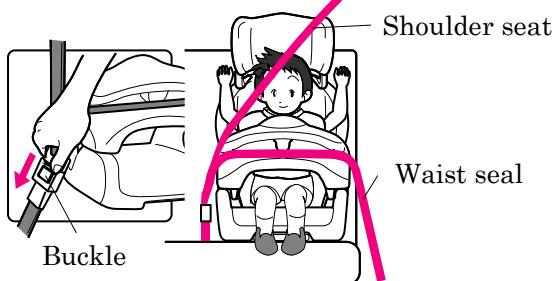

4. Pull shoulder seat belt to remove slack of waist seat belt.



5. Thread shoulder seat belt through seat belt conduit.

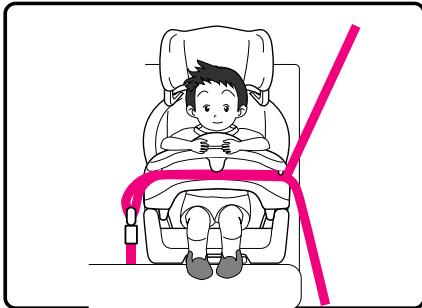

## How to use child safety seat **without** impact shield

1. Place child safety seat on a car's seat facing forward. Backrest of the product should contact car's backrest as close as possible.
2. Sit a child on a safety seat deep in a seat. Buckle up safety seat belt for sure.
3. Pass waist seat belt and shoulder seat belt through conduit as shown in Fig. Child should be restrained by pelvis. Verify that safety belt comes on



4. Adjust height of headrest so that shoulder seat belt comes just above shoulder.



5. Pass safety belt through conduit.




## How to use booster seat

1. Place booster seat deep in on a car's seat.
2. Sit a child deep in booster seat. Pass waist seat belt through conduit and buckle up for sure.  
Verify that safety best comes on groin so that child is restrained at pelvis.
3. Pass shoulder seat belt through conduit. Adjust it to come just above shoulder.
4. Make sure safety bests are securely tightened.




## How to remove seat cover for cleaning


1. Detach booster seat and backrest.




2. Unzip fastener on headrest and remove cover.



3. Unzip fastener on backrest, undo strings and remove cover.

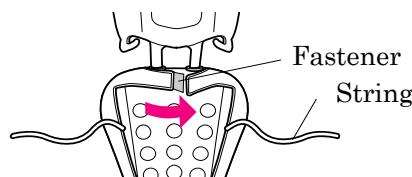

4. Unhook and unscrew applied and remove cover.

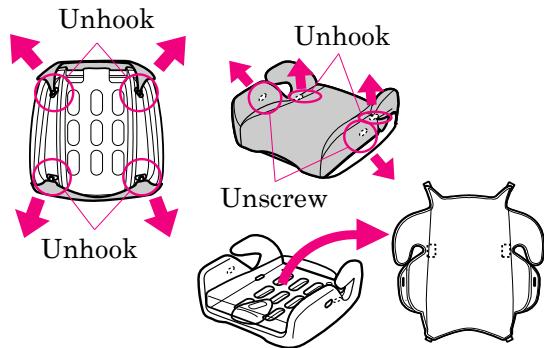

5. Unhook hooks inside conduit and remove cover.

